

Spa Pump

Ultimax™ - Niagara - Single Or Dual Speed



PUMPS




SPECIFICATIONS

- Center suction / radial side discharge orientation
- Suction Port: 2" or 2.5"
- Discharge Port: 2"
- Mechanical Seal: Carbon ceramic with Viton elastomers

OPTIONS

- True rated 1.5, 2, 3 and 4 HP models
- 115 volt options in 1.5 HP; remaining motors 230V 60Hz for North America and 230V 50 Hz TEFC motors for Europe
- 48 or 56 Frame Size 60 Hz
- 80 or 90 Frame Size 50 Hz
- Class F insulation
- Single or 2-speed models
- All spa pack or plug and play connection leads available

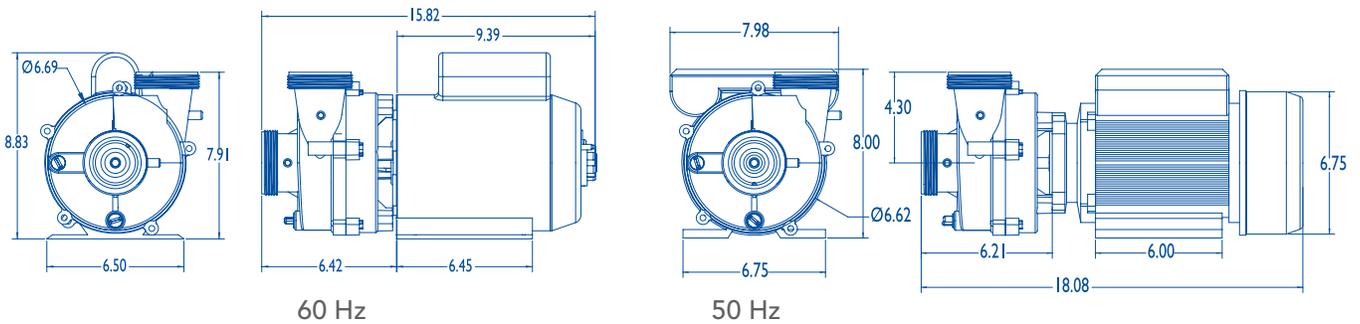

Descriptions:

Niagara pumps offer the options you need...an energy-efficient package, unsurpassed design flexibility, ease of installation, high flow rate and dependable operation.

MOTOR OPTIONS

- True rated 1.5, 2, 2.5, 3 and 4 HP models
- 115 volt options in 1.5 HP; remaining motors 230V 60Hz for North America and 230V 50 Hz TEFC motors for Europe
- 48 or 56 frame
- Class F insulation
- Single- or 2-speed models
- All spa pack or plug and play connection leads available
- Energy-Efficient package option